




IP67

技術參數 Technical Data

信號+小電源 Signal + Mini Power
電源+剎車 Power + Brake


額定電流	Rated Current	1A	7Ax4 + 1Ax2
額定電壓	Rated Voltage	100VAC	200VAC
絕緣材質	Insulation Material	Synthetic Resin UL94V-0	
絕緣電阻	Insulation Resistance	1000MΩ/500VDC	
觸點材料	Contact Material	Gold-plated Copper Alloy	
防護等級	IP Protection	IP67	
導體截面積	Wire Cross-Section	22-24AWG 0.20 ~ 0.32mm ²	18-20AWG 0.50 ~ 0.75mm ²
溫度範圍	Working Temperature	-40°C ~ 125°C	

訂購編號 Ordering Information

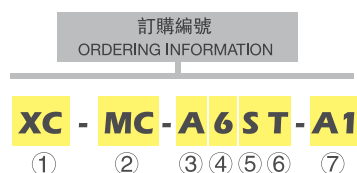


- 系列 Series**
XC EUMAX Connectors
- 產品分類 Designation**
MC Micro Motor Connectors
- 連接器類型 Connector Type**
A 彎插頭 Angled Plug
SA 小彎插頭 Small Angled Plug
R 插座 Socket
SR 小插座 Small Socket
- 芯數 Poles**
6 6 Poles, Power+Brake
7 7 Poles, Signal
- 觸點形式 Contact Gender**
S 母壓接針 Crimp Socket
P 公焊接針 Solder Pin
- 連接器外形 Profile**
Blank 直插頭 Straight Plug
T 斜插頭 Tilted Plug
B 勾板插座 Hooked Socket
- 入線方向 Cable Orientation**
Blank 插頭不付壓接母針(需另購)
Plugs w/o Crimp Contacts(Should be ordered separately)
A1 正向入線插頭, 附壓接母針
Load Side Plug w/ Crimp Socket
A2 反向入線插頭, 附壓接母針
Non-Load Side Plug w/ Crimp Socket
NB 無剎車插座 Socket w/o Brake



產品尺寸 Technical Dimensions

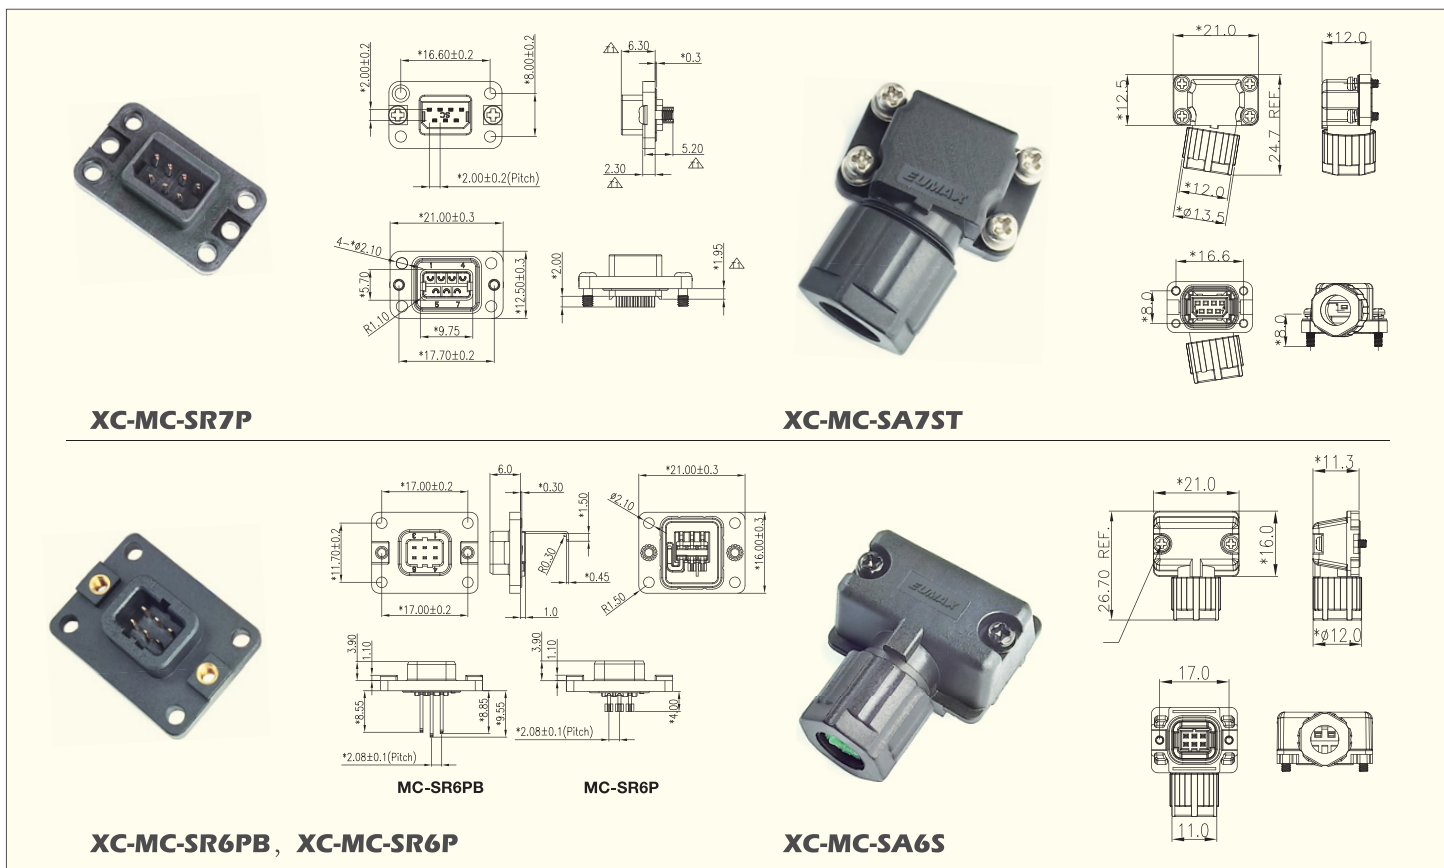

產品尺寸 Technical Dimensions

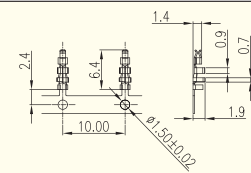

小電源/剎車壓接母針
Mini Power/Brake Crimp Socket
XC-MC-7S-10K
(10000 pcs /Reel 卷)

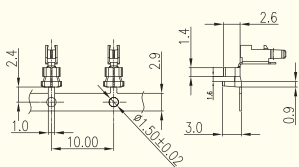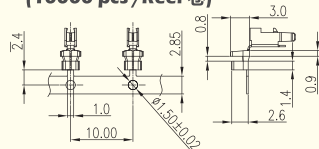


正向電源壓接母針
Load Side Power Crimp Socket
XC-MC-6S-A1-4K
(4000 pcs /Reel 卷)


反向電源壓接母針
Non-Load Side Power Crimp Socket
XC-MC-6S-A2-4K
(4000 pcs /Reel 卷)




XC-MC-R7P

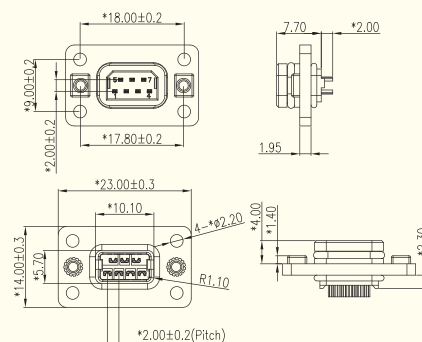


XC-MC-A7S

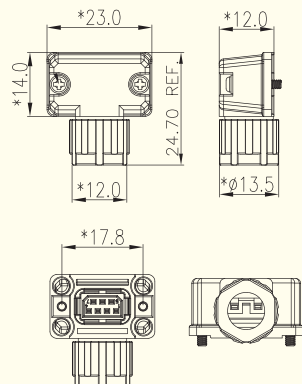


XC-MC-A7ST

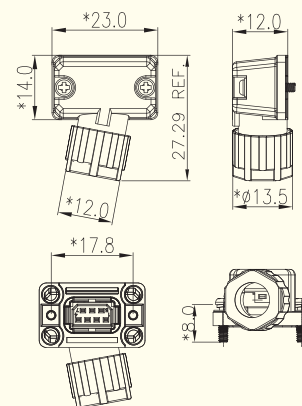


XC-MC-R6PB



XC-MC-A6S

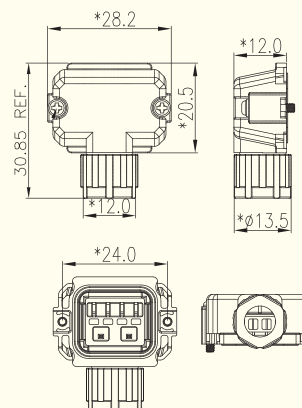

XC-MC-R6PT

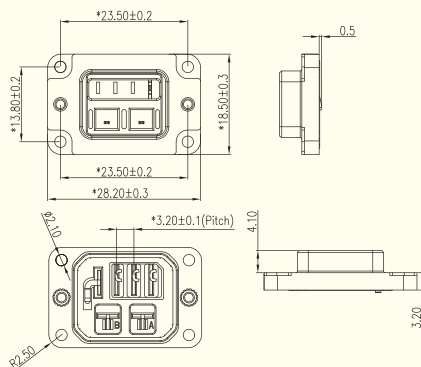

XC-MC-A6ST

