


特點 Features

- 20、26、34、40、50芯小型45mm寬IDC轉接模組
- 節省配綫空間，時間和成本
- 方便查修和維護
- 適用各種品牌PLC模組IDC轉接
- 歐規(-01)、日規(-02)和彈片式(-03A)端子台可供選用
- 提供各種芯數自由長度IDC連接綫
- 20、26、34、40、50 poles 45mm width slim IDC interface module
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for all PLC modules with IDC
- Choice of Cage-clamp(-01), Barrier(-02) or Spring(-03A) Type T/B
- Customized IDC cable assembly are welcomed.


配綫圖 Wiring Diagram

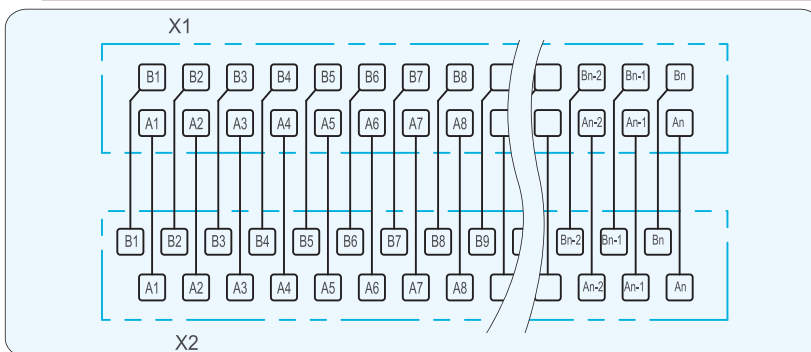


技術參數 Technical Data

額定電壓 Rated Voltage	DC 24V
額定電流 Rated Current	1A
耐電壓 Withstand Voltage	AC 500V 1 min
使用綫徑 Wire Gauge	26 ~ 16AWG
絕緣阻抗 Insulation Resistance	500MΩ/DC 500V
使用溫度 Operating Temperature	-20°C ~ +80°C
最大鎖緊扭力 Torque Maximum	0.5 Nm(-01), 0.8 Nm(-02)


外觀尺寸 Dimension

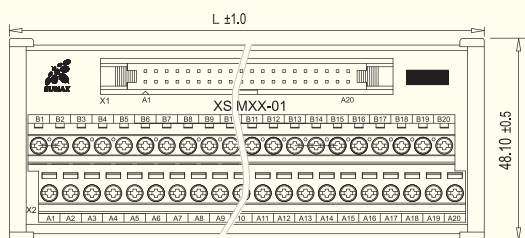


XSHM □ □ -01 Type




型號 P/N	長*寬*高 L*W*Hmm
XSHM20-01	62*48.1*53
XSHM26-01	76*48.1*53
XSHM34-01	96*48.1*53
XSHM40-01	111*48.1*53
XSHM50-01	138*48.1*53

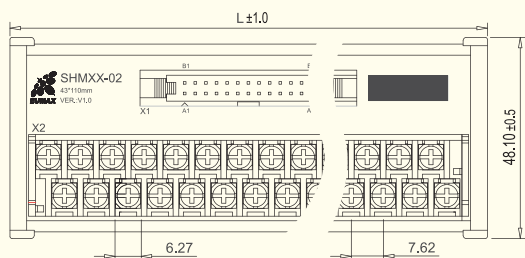


XSHM □ □ -02 Type




型號 P/N	長*寬*高 L*W*Hmm
XSHM20-02	92*48.1*48
XSHM26-02	114*48.1*48
XSHM34-02	144*48.1*48
XSHM40-02	167*48.1*48
XSHM50-02	206*48.1*48

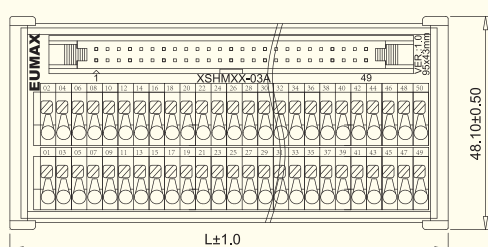

XSHM □ □ -03A Type



型號 P/N	長*寬*高 L*W*Hmm
XSHM20-03A	54*48.1*48
XSHM26-03A	62*48.1*48
XSHM34-03A	74*48.1*48
XSHM40-03A	82*48.1*48
XSHM50-03A	99*48.1*48

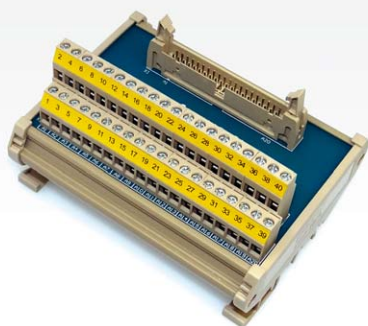

XHM□□-01


特點 Features

- 20、26、34、40、50芯IDC連接器轉接模組
- 節省配綫空間，時間和成本
- 方便查修和維護
- 適用各種品牌伺服PLC模組IDC接口轉接
- 提供各種芯數自由長度IDC連接綫
- 20、26、34、40、50 poles IDC converter
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for Servo drives PLC with IDC interface
- Customized IDC cable assembly are welcomed.



技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	1A/125VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500M Ω /DC 500V
使用溫度 Operating Temperature	-20°C ~ +80°C
使用綫徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

配綫圖 Wiring Diagram

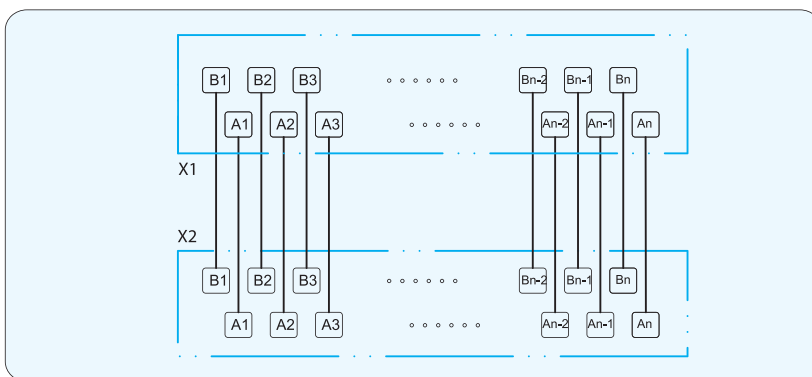

外觀尺寸 Dimension

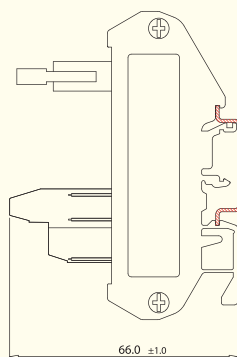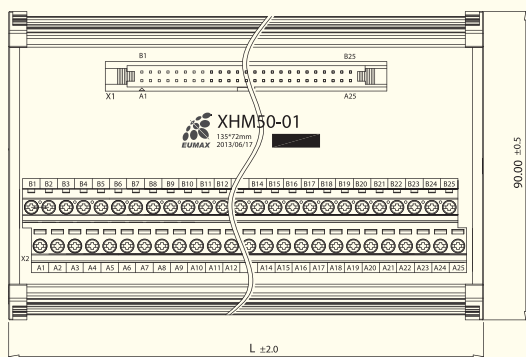

型號 P/N	長度L*寬度W*高度H mm
XHM20-01	61*90*66
XHM26-01	76*90*66
XHM34-01	97*90*66
XHM40-01	113*90*66
XHM50-01	138*90*66

IDC連接綫 Cable Assembly

□□: Number of Contacts $\Delta\Delta$: Length(M)



WHH□□/ΔΔ



WHH□□/ΔΔ-R



WHH□□/ΔΔ-P

型號 P/N	Connector	Termination	Hood
WHH□□/ΔΔ	MIL	IDC	-
WHH□□/ΔΔ-R	MIL	IDC	Rubber
WHH□□/ΔΔ-P	MIL	Crimping	Plastic



XDM□□-01

XDM□□-02


特點 Features

- 9、15、25、37、50芯D-SUB連接器轉接模組。
- 節省配線空間，時間和成本
- 方便查修和維護
- 適用各種品牌PLC模組IDC轉接
- 公端模組(-01)和母端模組(-02)可供選用
- 提供各種芯數自由長度D-SUB纜束
- 9、15、25、37、50 poles D-SUB/TB converter
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for PLC modules with D-SUB interface
- Choice of Pin Module(-01) and Socket Module(-02)
- Customized D-SUB cable assembly are welcomed.



技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	1A/250VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500MΩ/DC 500V
使用溫度 Operating Temperature	-20℃ ~ +80℃
使用線徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

配線圖 Wiring Diagram

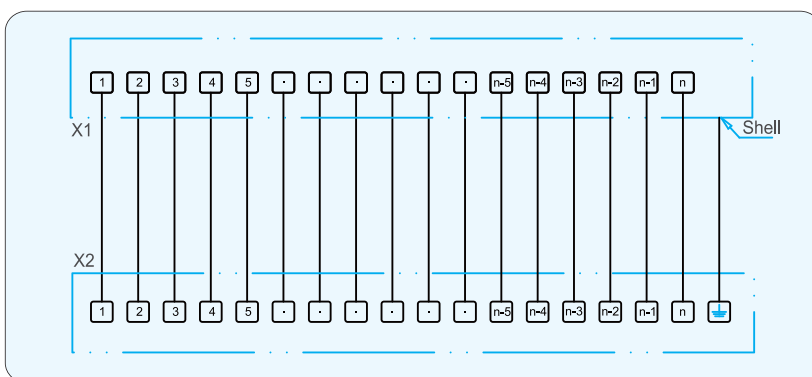


外觀尺寸 Dimension

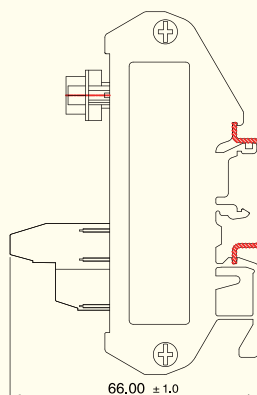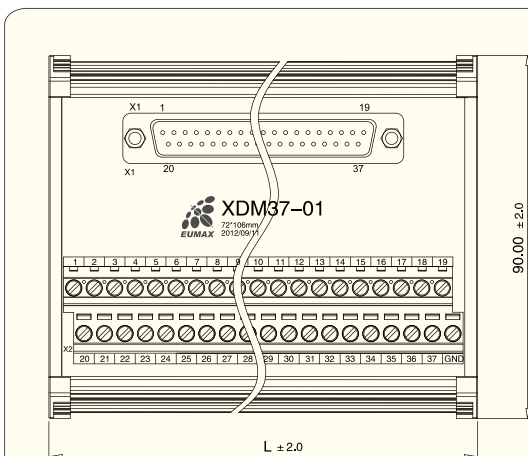

型號 P/N	長度L*寬度W*高度H mm
XDM09-01	43*90*66
XDM15-01	53*90*66
XDM25-01	80*90*66
XDM37-01	109*90*66
XDM50-01	140*90*66
型號 P/N	長度L*寬度W*高度H mm
XDM09-02	43*90*66
XDM15-02	53*90*66
XDM25-02	80*90*66
XDM37-02	109*90*66
XDM50-02	140*90*66

D-SUB連接纜 D-SUB Cable Assembly


□□: Number of Contacts △△: Length(M)



WHDM Type

WHDF Type


型號 P/N	Connector	Termination	Hood
WHD□□/△△	DF/DM	Soldering	Plastic
WHDF□□/△△	DF/DF	Soldering	Plastic
WHDM□□/△△	DM/DM	Soldering	Plastic



WHDM-M Type

WHDF-M Type

型號 P/N	Connector	Termination	Hood
WHD□□/△△-M	DF/DM	Soldering	Metal
WHDF□□/△△-M	DF/DF	Soldering	Metal
WHDM□□/△△-M	DM/DM	Soldering	Metal

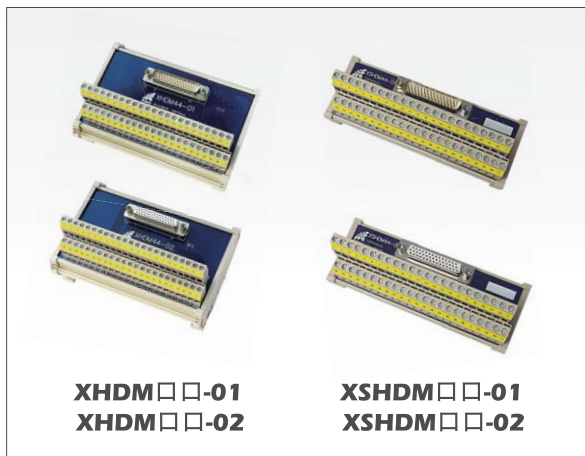


特點 Features

- 15、26、44 芯高密度 D-SUB 轉接模組。
- 節省配線空間，時間和成本
- 方便查修和維護
- 適用各種品牌 PLC 模組 IDC 轉接
- 公端模組 (-01) 和母端模組 (-02) 可供選用
- 提供各種芯數自由長度 D-SUB 纜束
- 15、26、44 poles high density D-SUB/TB converter
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for PLC modules with D-SUB interface
- Choice of Pin Module(-01) and Socket Module(-02)
- Customized D-SUB cable assembly are welcomed.

技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	1A/125VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500M Ω /DC 500V
使用溫度 Operating Temperature	-20 $^{\circ}$ C ~ +80 $^{\circ}$ C
使用線徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

配線圖 Wiring Diagram

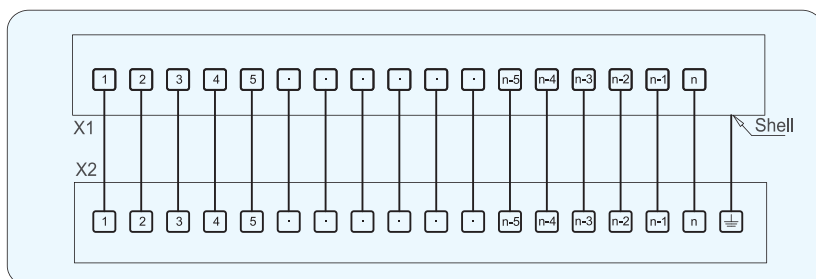

外觀尺寸 Dimension

XHDMXX-01

型號 P/N	長*寬*高 L*W*Hmm
XHDM15-01	51*90*66
XHDM15-02	51*90*66
XHDM26-01	82*90*66
XHDM26-02	82*90*66
XHDM44-01	128*90*66
XHDM44-02	128*90*66

XSHDM44-01/02

型號 P/N	長*寬*高 L*W*Hmm
XSHDM44-01	129*48*53
XSHDM44-02	129*48*53

HD-SUB連接線 HD-SUB Cable Assembly


□□: Number of Contacts △△: Length(M)

WHDM Type WHDF Type

型號 P/N	Connector	Termination	Hood
WHHD□□/△△	HDF/HDM	Soldering	Plastic
WHHDF□□/△△	HDF/HDF	Soldering	Plastic
WHHDM□□/△△	HDM/HDM	Soldering	Plastic

WHDM-M Type WHDF-M Type

型號 P/N	Connector	Termination	Hood
WHHD□□/△△-M	HDF/HDM	Soldering	Metal
WHHDF□□/△△-M	HDF/HDF	Soldering	Metal
WHHDM□□/△△-M	HDM/HDM	Soldering	Metal

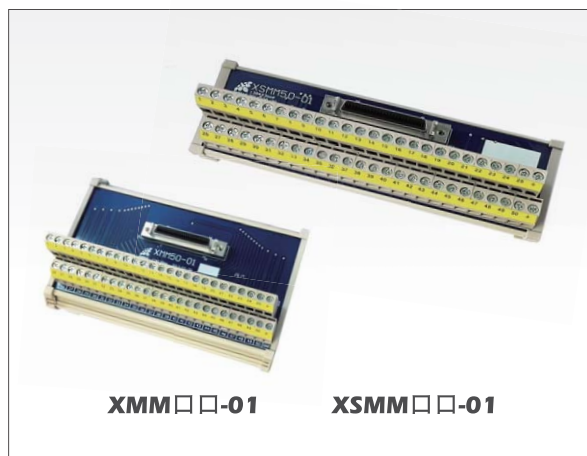

XMM□□-01

XSMM□□-01


特點 Features

- 20、26、36、50芯MDR連接器轉接模組
- 節省配綫空間，時間和成本
- 方便查修和維護
- 適用各種品牌伺服驅動器CN1 MDR接口轉接
- 有標準(**XMM**)和小型(**XSMM**)模組可供選用
- 提供各種芯數自由長度MDR綫束
- 20、26、36、50 poles MDR/TB converter
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for Servo drives CN1 with MDR interface
- Choice of standard (**XMM**) and slim (**XSMM**) width models
- Customized MDR cable assembly are welcomed.

技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	0.5A/150VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500MΩ/DC 500V
使用溫度 Operating Temperature	-20°C ~ +80°C
使用綫徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

配綫圖 Wiring Diagram

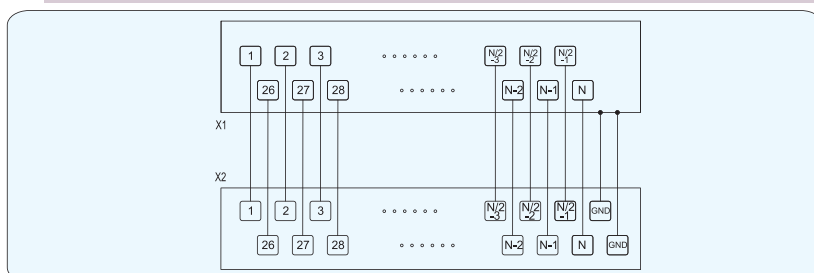

外觀尺寸 Dimension

XMM50-01
72*138mm 2013/06/05

型號 P/N	長L*寬W*高H mm
XMM20-01	66*90*66
XMM26-01	82*90*66
XMM36-01	108*90*66
XMM50-01	141*90*66

XSMM50-01
72*138mm 2013/06/05

型號 P/N	長L*寬W*高H mm
XSMM20-01	66*48.1*53
XSMM26-01	82*48.1*53
XSMM36-01	108*48.1*53
XSMM50-01	141*48.1*53

MDR連接綫 Cable Assembly

□□: Number of Contacts △△: Length(M)



WHM Type

WHX Type

WHXF Type

型號 P/N	Connector	Termination	Hood
WHM □□/△△	MDR	IDC	Latch
WHX □□/△△	XDR	Soldering	Screw
WHXF □□/△△	XDR	Soldering	Latch



XFM40-01

XSFM40-02


特點 Features

- 40芯FCN連接器轉接模組
- 節省配綫空間，時間和成本
- 方便查修和維護
- 適用各種品牌伺服PLC模組FCN接口轉接
- 歐規(-01)和日規(-02)端子台可供選用
- 提供40芯自由長度FCN連接綫
- 40 poles FCN TB converter
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for Servo drives PLC with FCN interface
- Choice of Cage-clamp(-01) or Barrier(-02) Type T/B
- Customized FCN cable assembly are welcomed.


技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	1A/125VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500M Ω /DC 500V
使用溫度 Operating Temperature	-20°C ~ +80°C
使用綫徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm(-01), 0.8 Nm(-02)

配綫圖 Wiring Diagram

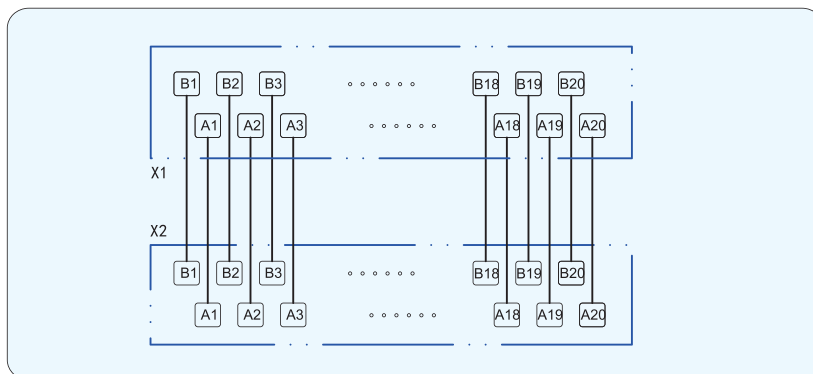

外觀尺寸 Dimension

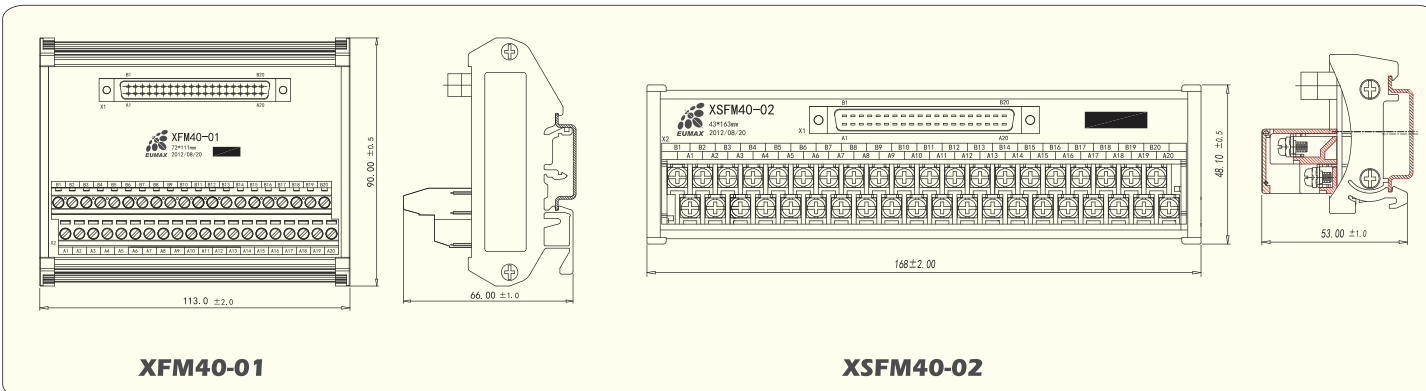

XFM40-01

XSFM40-02

FCN連接綫 Cable Assembly

□□: Number of Contacts $\Delta\Delta$: Length(M)



WHF40 Type

WHFP40 Type

型號 P/N	Connector	Termination	Hood
WHF40/$\Delta\Delta$	1473381-1	Soldering	Plastic
WHFP40/$\Delta\Delta$	1903404-1	IDC	-



HDM20-01



HDM50-01



HDM20-02



HDM50-02


特點 Features

- 20、50芯MR連接器轉接模組
- 節省配綫空間，時間和成本
- 母端模組(-01)和公端模組(-02)可供選用
- 適用FANUC和安川機器人伺服驅動轉接接口
- 提供各種芯數自由長度MR連接綫
- 20、50 poles MR/TB converter
- Save wiring space, time and cost
- Choice of Socket Module(-01) and Pin Module(-02)
- Applicable for FANUC and YASKAWA robots Servo drives interface
- Customized MR cable assembly are welcomed.



技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	1A/125VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500M Ω /DC 500V
使用溫度 Operating Temperature	-20 $^{\circ}$ C ~ +80 $^{\circ}$ C
使用綫徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

配綫圖 Wiring Diagram

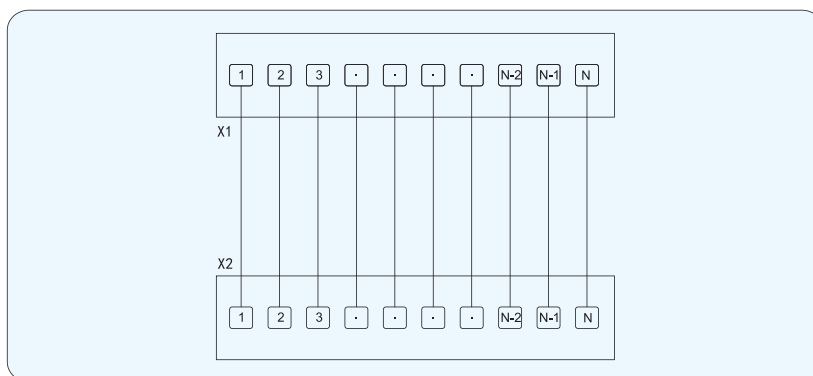

外觀尺寸 Dimension

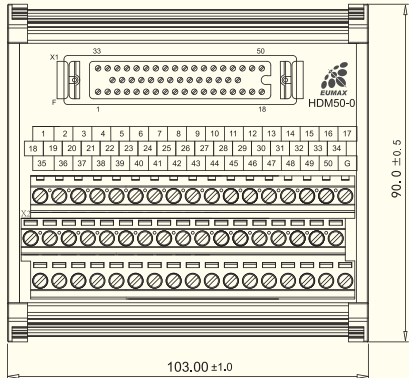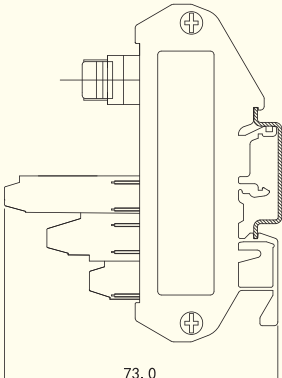型號 P/N	長L*寬W*高H mm
HDM20-01	63*90*66
HDM20-02	63*90*66
HDM50-01	103*90*73
HDM50-02	103*90*73

MR連接綫 Cable Assembly

□ : Number of Contacts $\Delta\Delta$: Length(M)



WHMRM50 Type



WHMRF50 Type

型號 P/N	Connector	Termination	Hood
WHMRM20/$\Delta\Delta$	MR-20LM	Soldering	Plastic
WHMRF20/$\Delta\Delta$	MR-20LF	Soldering	Plastic
WHMRM50/$\Delta\Delta$	MR-50LM	Soldering	Plastic
WHMRF50/$\Delta\Delta$	MR-50LF	Soldering	Plastic