


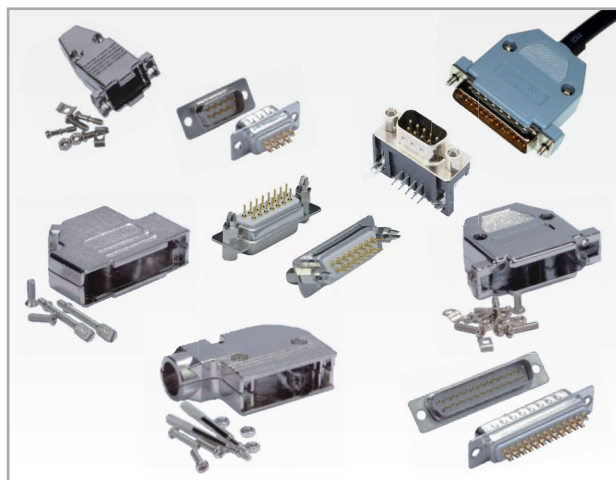

特點 Features

- 抗電磁干擾結構設計
- 提供9、15、25、37、50芯插頭和插座，鍍金3μ"
- 可選用塑殼、電鍍塑殼和金屬外殼
- 產品符合RoHs環保規範
- Shielded against EMI
- 9, 15, 25, 37, 50 poles plugs and sockets, gold-plated pin 3μ"
- Choice of plastic, metallized plastic and metal backshells
- RoHs compliant

技術規格 Technical Data

額定電流/電壓	Rated Current/Voltage	5A/250VAC
絕緣材料	Insulation Material	Fiber-glass reinforced PBT
絕緣阻抗	Insulation Resistance	500MΩ / 500VDC
耐電壓	Dielectric Strength	1000VAC
觸點材質	Contact Material	Gold-Plated Copper Alloy
阻燃性	Flammability	UL 94V-0
塑殼材料	Plastic Shell Material	ABS Resin
金屬殼材料	Metal Shell Material	Zinc Diecast
螺絲規格	Screw Specification	#4-40 UNC
使用溫度	Operating Temperature	-20℃~+80℃
使用線徑	Wire Gauge	22-28AWG

訂購編號 ORDERING INFORMATION

XDB - 25 F - HM - 45

① ② ③ ④ ⑤

① 系列名稱 Series

XDB系列 D-Sub連接器

XDB Series D-Sub Connectors

② 芯數 No. of Contacts

9, 15, 25, 37, 50

③ 觸點類型 Connector Contact Gender

F: Female Socket, Solder

M: Male Pin, Solder

Blank: No Connector, Backshell only

④ 殼體類型 Backshell

Blank: No Backshell, Connector only

PM: Plastic Backshell

HM: Metal Backshell

VM: Vacuum Metallized Backshell

BM: PC Board Mount Socket w/Screw & Board Lock

⑤ 殼體出線角度 Backshell Outlet Angle

Blank: 180度出線 180° Outlet

45: 45度出線 45° Outlet

90: 90度出線 90° Outlet




XDB-25M Male Connector



XDB-25F Female Connector



XDB-15F-BM Female Socket

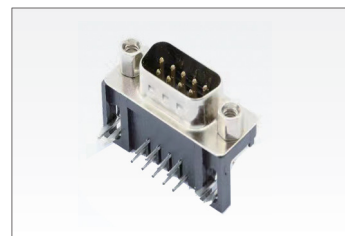


XDB-9M-BM-90 R/A Male Socket



PM Plastic Backshell 180°



VM Metallized Backshell 180°

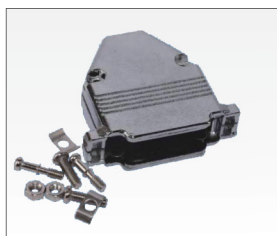


HM Metal Backshell 180°



HM Metal Backshell 45°



HM Metal Backshell 90°

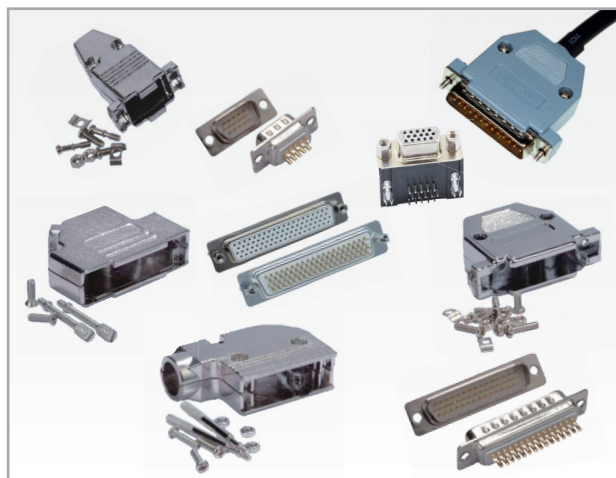

特點 Features

- 抗電磁干擾結構設計
- 提供15、26、44、62、78芯插頭和插座，鍍金3μ"
- 可選用塑殼、電鍍塑殼和金屬外殼
- 產品符合RoHs環保規範
- Shielded against EMI
- 15, 26, 44, 62, 78 poles plugs and sockets, gold-plated pin 3μ"
- Choice of plastic, metallized plastic and metal backshells
- RoHs compliant

技術規格 Technical Data

額定電流/電壓	Rated Current/Voltage	3A/250VAC
絕緣材料	Insulation Material	Fiber-glass reinforced PBT
絕緣阻抗	Insulation Resistance	500MΩ / 500VDC
耐電壓	Dielectric Strength	1000VAC
觸點材質	Contact Material	Gold-Plated Copper Alloy
阻燃性	Flammability	UL 94V-0
塑殼材料	Plastic Shell Material	ABS Resin
金屬殼材料	Metal Shell Material	Zinc Diecast
螺絲規格	Screw Specification	#4-40 UNC
使用溫度	Operating Temperature	-20℃~+80℃
使用線徑	Wire Gauge	22-28AWG

訂購編號 ORDERING INFORMATION

XHDB - 44 F - HM - 45

① ② ③ ④ ⑤

① 系列名稱 Series

XHDB系列 HD-Sub連接器

XHDB Series HD-Sub Connectors

② 芯數 No. of Contacts

15, 26, 44, 62, 78

③ 觸點類型 Connector Contact Gender

F: Female Socket, Solder

M: Male Pin, Solder

Blank: No Connector, Backshell only

④ 殼體類型 Backshell

Blank: No Backshell, Connector only

PM: Plastic Backshell

HM: Metal Backshell

VM: Vacuum Metallized Backshell

BM: PC Board Mount Socket w/Screw & Board Lock

⑤ 殼體出線角度 Backshell Outlet Angle

Blank: 180度出線 180° Outlet

45: 45度出線 45° Outlet

90: 90度出線 90° Outlet



XHDB-44M Male Connector



XHDB-44F Female Connector



XHDB-78F-BM Female Socket




XHDB-15F-BM-90 R/A Male Socket



PM Plastic Backshell 180°



VM Metallized Backshell 180°



HM Metal Backshell 180°



HM Metal Backshell 45°



HM Metal Backshell 90°