


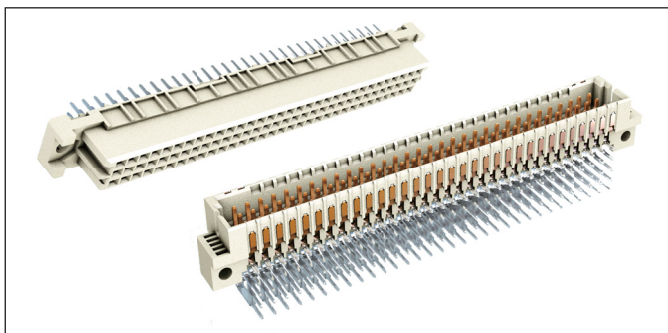

訂購編號 ORDERING INFORMATION

41612 C - M A 396 C - XXX

① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列 Series **41612**: DIN 41612 / IEC60603-2
- ② 型式 Type **B**: Type B (2-Row) **H**: Type H (2-Row)
C: Type C (3-Row) **F**: Type F (3-Row)
- ③ 類型 Connector **M**: 公連接器 Male Connector
F: 母連接器 Female Connector
- ④ PCB針 PCB Pin **S**: 直腳 Straight Pin, Solder
A: 彎腳 Angled Pin, Solder
- ⑤ 芯數 Poles Type B: **264, 232, 220**
Type C: **396, 364, 348, 332, 330, 320**
Type F: Low Profile: **348L, 332L**
High Profile: **348H, 332H**
Type H: **215, 203**
- ⑥ 固定腳 Snap-in Clips **Blank**: 無固定腳 w/o Snap-in Clips
C: 有固定腳 with Snap-in Clips
- ⑦ PC針長度 PC Tail Length **Blank**: Standard Male(3.0mm) Female(4.5mm)
Others: **2.9, 3.5, 3.7, 4.0, 13, 22 mm**

特點 Features

- 符合 DIN 41612/IEC 60603-2 規範之歐卡連接器
- 提供2排Type B(2A), Type H(15A)和3排Type C(2A), Type F(6A)連接器
- 提供直腳/彎腳公連接器, 直腳母連接器
- DIN 41612 / IEC 60603-2 compliant PCB connectors
- Provides 2-Row Type B(2A), Type H(15A) and 3-Row Type C (2A), Type F(6A) connectors
- Offers 20-96 contacts Angled/Straight Solder Pin Male connectors and Straight Female connectors

技術參數 Technical Data




注塑材料 Molding Material	聚酯塑膠加玻纖 Thermoplastic Resin GF filled
阻燃等級 Flammability	UL 94V-0
觸點材質 Contact Material	銅合金 Copper Alloy
觸點處理 Contact Plating	觸點鍍金 焊點鍍錫 Gold-plated Contact Tin-plated PCB Pin
額定電壓 Rated Voltage	150V(Type B & C), 400V(Type F), 600V(Type H)
額定電流 Rated Current	2A (Type B&C), 6A (Type F), 15A (Type H)
耐電壓 Withstanding Voltage	1000 Vrms for 1 minute
絕緣阻抗 Insulation Resistance	$\geq 10^{12} \Omega$
工作溫度 Working Temperature	-55°C to +125°C
PCB資料 PCB Data	PCB Spacing: 2.54mm (Type B&C), 5.08mm (Type F&H)

41612 Type B




尺寸圖 Dimensions

鑽孔尺寸圖 Board Drillings

公連接器 Male Connectors

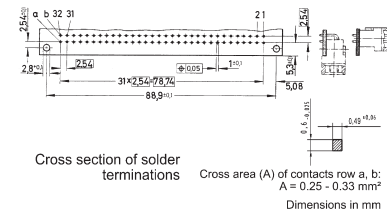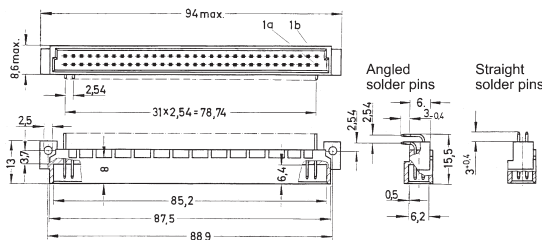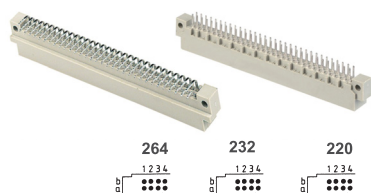


母連接器 Female Connectors

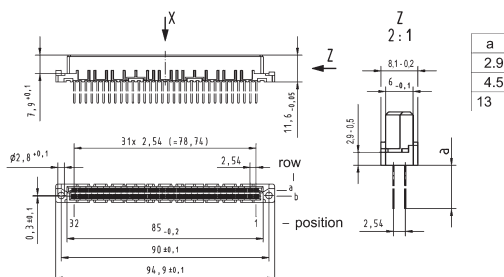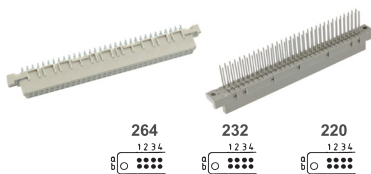


The pictures and dimensions shown are for 264 only, please request for 232, 220.

41612 Type C

公连接器 Male Connectors




母連接器 Female Connectors

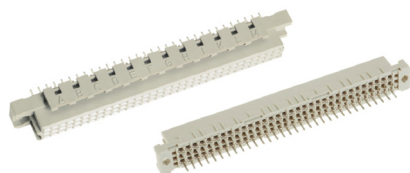


The pictures and dimensions shown are for **396** and **364** only, please request for **348**, **332**, **330** and **320**.

尺寸圖 Dimensions

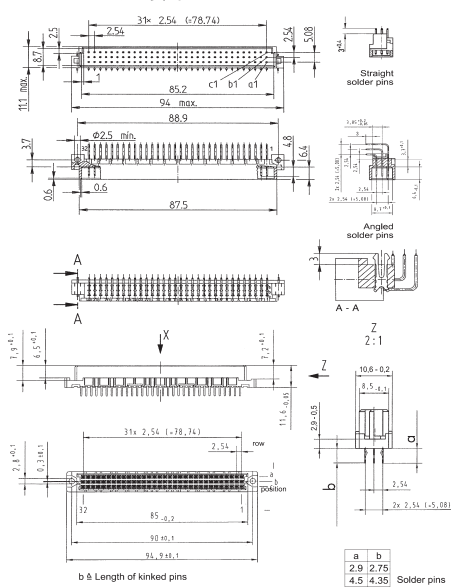


鑽孔尺寸圖 Board Drillings

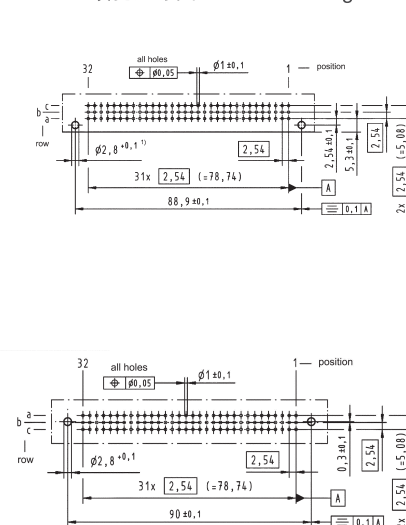


41612 Type F


公连接器 Male Connectors

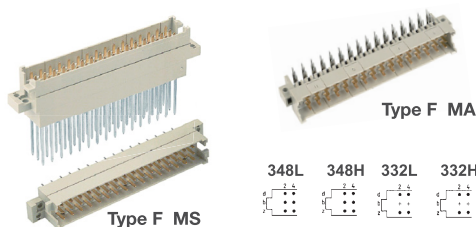


母连接器 Female Connectors

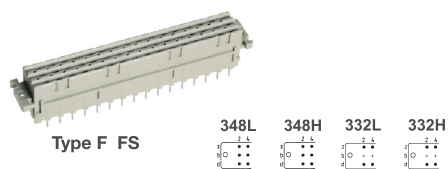

尺寸圖 Dimensions

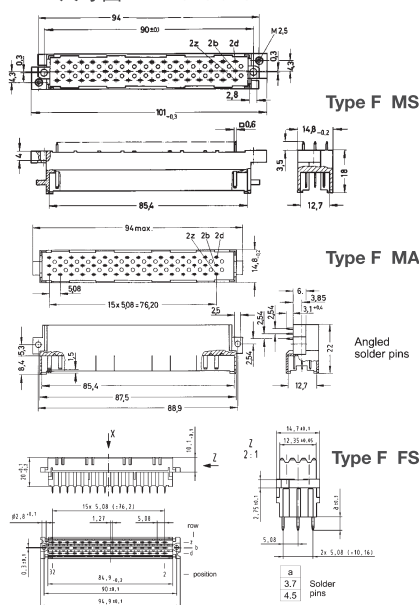


鑽孔尺寸圖 Board Drillings

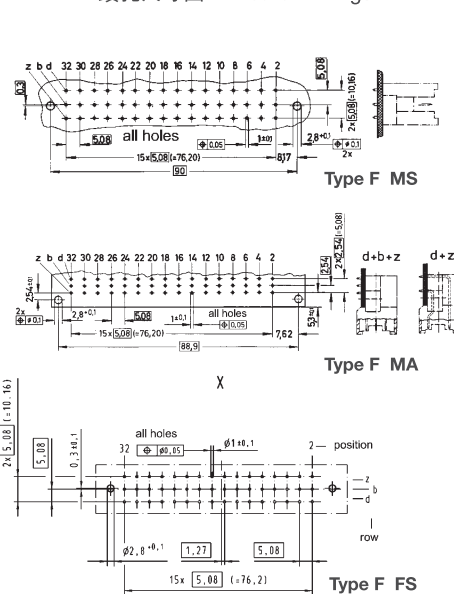


41612 Type H


公连接器 Male Connectors

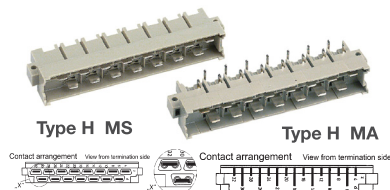

母连接器 Female Connectors



尺寸圖 Dimensions

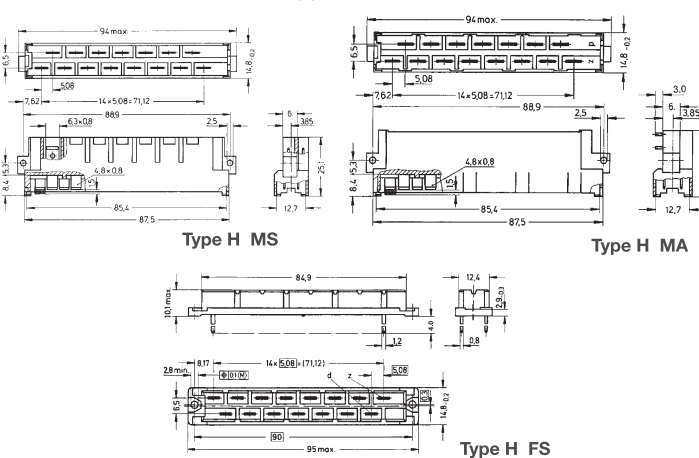

鑽孔尺寸圖 Board Drillings

