


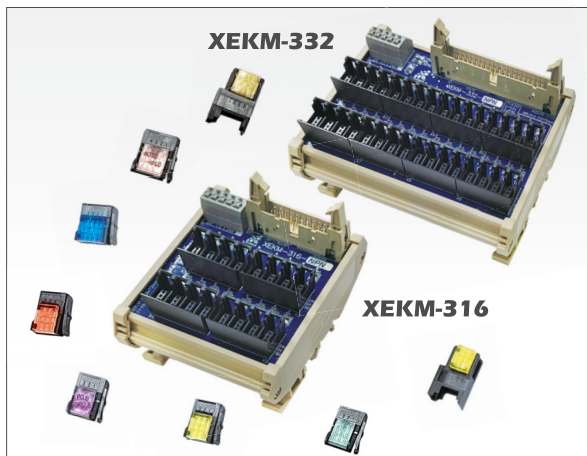


特點 Features

- 可大幅降低傳感器配線時間和占用空間
- 配置LED指示燈可連接各品牌控制器
- 不需額外電源端子,適用二線式和三線式傳感器
- 提供16, 32組I/O點數模組, 有NPN和PNP可選
- To reduce the wiring time and space in installation
- LED indicators for ease of integrating with various controllers
- No extra power supply required when connecting sensors
- Providing 16 and 32 I/O points module with NPN and PNP signals

訂購編號 Ordering P/N	I/O點數 I/O Points	信號 Signals	長x寬x高 LxWxH mm
XEKM-316-NPN	16	NPN	72x90x62
XEKM-316-PNP	16	PNP	72x90x62
XEKM-332-NPN	32	NPN	115x90x62
XEKM-332-PNP	32	PNP	115x90x62


配線圖 Wiring Diagram

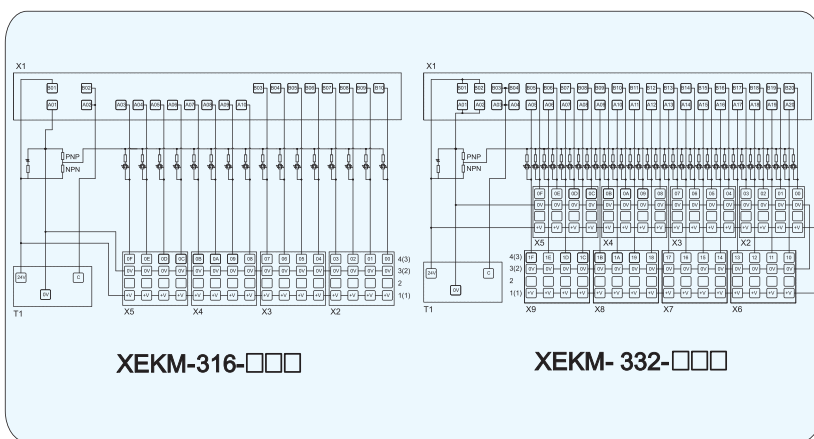

技術參數 Technical Data


額定電壓 Rated Voltage	≤ 32 VAC/VDC
額定電流 Rated Current	1A
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500MΩ /DC500V
使用線徑 Wire Gauge	26~20AWG
使用溫度 Operating Temperature	-20°C ~ +80°C

外觀尺寸 Dimension

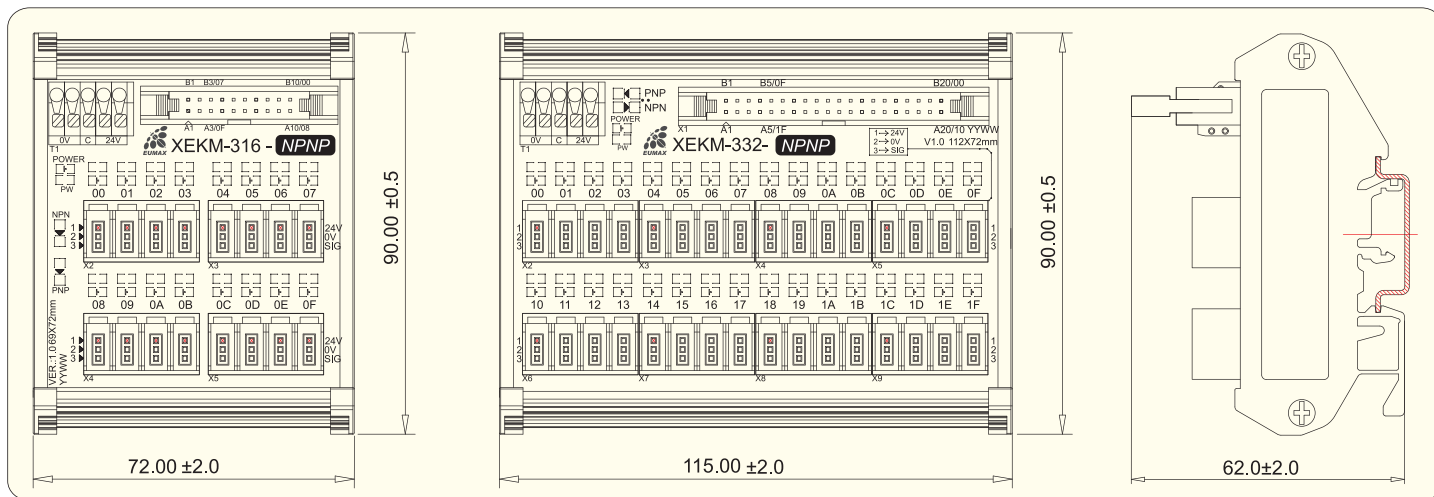

EK連接器(公插頭) EK Connectors(Plugs)

P/N	EK-03P-RD	EK-03P-YE	EK-03P-OG	EK-03P-GN	EK-03P-BU	EK-03P-GY
Wire	24~26AWG	24~26AWG	24~26AWG	20~22AWG	20~22AWG	20~22AWG
Size	37103-3101 Φ0.8~Φ1.0	37103-3122 Φ1.0~Φ1.2	37103-3163 Φ1.2~Φ1.6	37103-2124 Φ1.0~Φ1.2	37103-2165 Φ1.2~Φ1.6	37103-2206 Φ1.6~Φ2.0

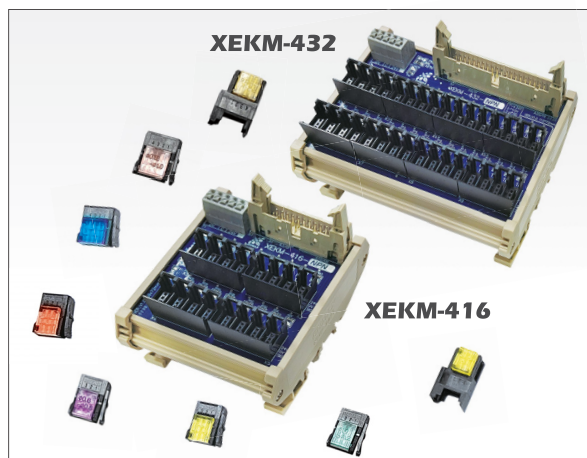


特點 Features

- 可大幅降低傳感器配線時間和占用空間
- 配置LED指示燈可連接各品牌控制器
- 不需額外電源端子,適用二線式和三線式傳感器
- 提供16, 32組I/O點數模組, 有NPN和PNP可選
- To reduce the wiring time and space in installation
- LED indicators for ease of integrating with various controllers
- No extra power supply required when connecting sensors
- Providing 16 and 32 I/O points module with NPN and PNP signals

訂購編號 Ordering P/N	I/O點數 I/O Points	信號 Signals	長x寬x高 LxWxH mm
XEKM-416-NPN	16	NPN	72x90x62
XEKM-416-PNP	16	PNP	72x90x62
XEKM-432-NPN	32	NPN	115x90x62
XEKM-432-PNP	32	PNP	115x90x62


配線圖 Wiring Diagram

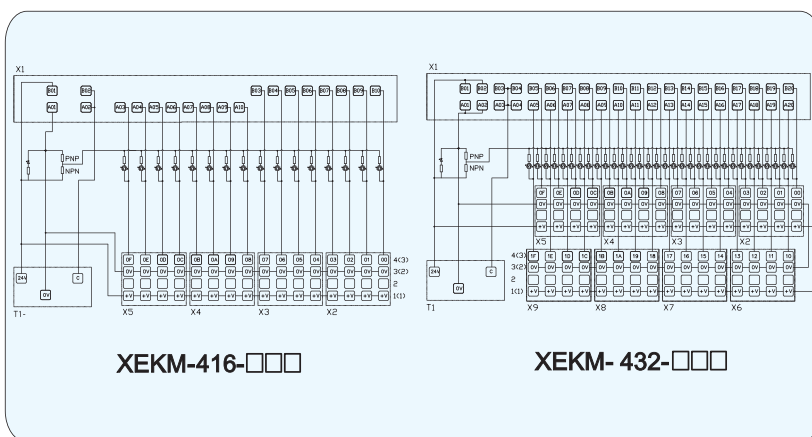

技術參數 Technical Data

額定電壓 Rated Voltage	≤ 32 VAC/VDC
額定電流 Rated Current	1A
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500MΩ /DC500V
使用線徑 Wire Gauge	26~20AWG
使用溫度 Operating Temperature	-20°C ~ +80°C

外觀尺寸 Dimension

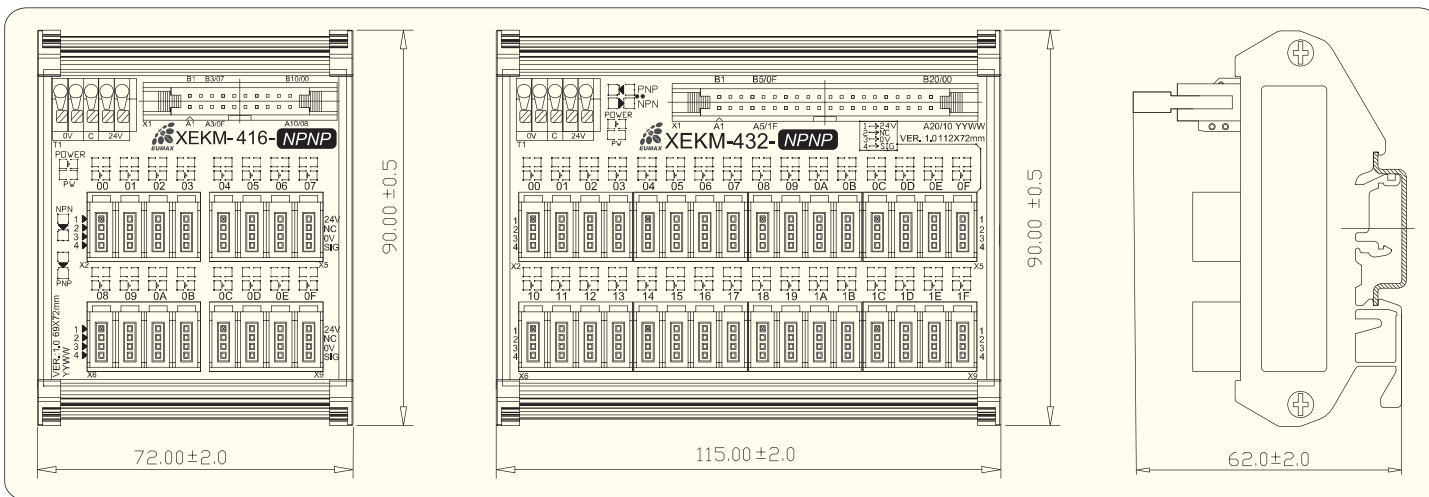

EK連接器(公插頭) EK Connectors(Plugs)

P/N	EK-04P-RD	EK-04P-YE	EK-04P-OG	EK-04P-GN	EK-04P-BU	EK-04P-GY
Wire	24~26AWG	24~26AWG	24~26AWG	20~22AWG	20~22AWG	20~22AWG
Size	37104-3101 Φ0.8~Φ1.0	37104-3122 Φ1.0~Φ1.2	37104-3163 Φ1.2~Φ1.6	37104-2124 Φ1.0~Φ1.2	37104-2165 Φ1.2~Φ1.6	37104-2206 Φ1.6~Φ2.0