

**XMM**□□-01

**XSMM**□□-01


### 特點 Features

- 20、26、36、50芯MDR連接器轉接模組
- 節省配綫空間，時間和成本
- 方便查修和維護
- 適用各種品牌伺服驅動器CN1 MDR接口轉接
- 有標準(**XMM**)和小型(**XSMM**)模組可供選用
- 提供各種芯數自由長度MDR綫束
- 20、26、36、50 poles MDR/TB converter
- Save wiring space, time and cost
- Easy for inspection and maintenance
- Applicable for Servo drives CN1 with MDR interface
- Choice of standard (**XMM**) and slim (**XSMM**) width models
- Customized MDR cable assembly are welcomed.

### 技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	0.5A/150VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500MΩ/DC 500V
使用溫度 Operating Temperature	-20°C ~ +80°C
使用綫徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

### 配綫圖 Wiring Diagram

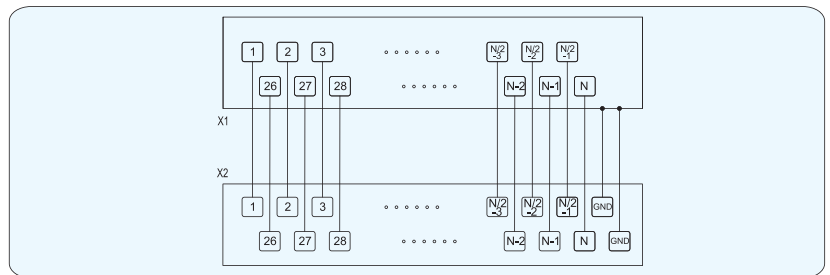

### 外觀尺寸 Dimension

XMM50-01  
EUMAX 72\*138mm 2013/02/25

90.0 ±0.5

L ±2.0

66.00 ±1.0

型號 P/N	長L*寬W*高H mm
<b>XMM20-01</b>	66*90*66
<b>XMM26-01</b>	82*90*66
<b>XMM36-01</b>	108*90*66
<b>XMM50-01</b>	141*90*66

XSMM50-01  
EUMAX 72\*138mm

48.10


L ±2.0

53.0 ±1.0

型號 P/N	長L*寬W*高H mm
<b>XSMM20-01</b>	66*48.1*53
<b>XSMM26-01</b>	82*48.1*53
<b>XSMM36-01</b>	108*48.1*53
<b>XSMM50-01</b>	141*48.1*53

### MDR連接綫 Cable Assembly

□□: Number of Contacts    △△: Length(M)

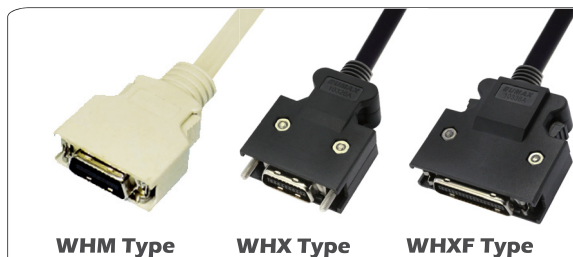

**WHM Type**

**WHX Type**

**WHXF Type**

型號 P/N	Connector	Termination	Hood
<b>WHM</b> □□/△△	MDR	IDC	Latch
<b>WHX</b> □□/△△	XDR	Soldering	Screw
<b>WHXF</b> □□/△△	XDR	Soldering	Latch