


### 特點 Features

- 20、50芯MR連接器轉接模組
  - 節省配綫空間，時間和成本
  - 母端模組(-01)和公端模組(-02)可供選用
  - 適用FANUC和安川機器人伺服驅動轉接接口
  - 提供各種芯數自由長度MR連接綫
- 20、50 poles MR/TB converter
  - Save wiring space, time and cost
  - Choice of Socket Module(-01) and Pin Module(-02)
  - Applicable for FANUC and YASKAWA robots Servo drives interface
  - Customized MR cable assembly are welcomed.

### 技術參數 Technical Data

額定電流/電壓 Rated Current/Voltage	1A/125VAC
耐電壓 Withstand Voltage	AC 500V 1 min
絕緣阻抗 Insulation Resistance	500MΩ/DC 500V
使用溫度 Operating Temperature	-20°C ~ +80°C
使用綫徑 Wire Gauge	26 ~ 16AWG
最大鎖緊扭力 Torque Maximum	0.5 Nm

### 配綫圖 Wiring Diagram

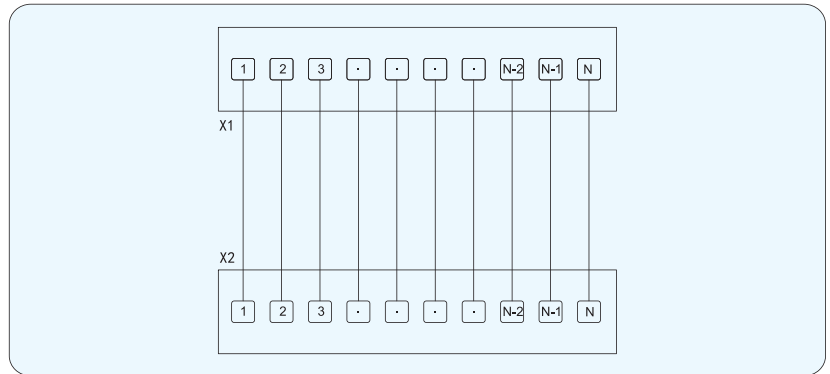

### 外觀尺寸 Dimension

型號 P/N	長L*寬W*高H mm
<b>HDM20-01</b>	63*90*66
<b>HDM20-02</b>	63*90*66
<b>HDM50-01</b>	103*90*73
<b>HDM50-02</b>	103*90*73

### MR連接綫 Cable Assembly

□: Number of Contacts    △△: Length(M)



型號 P/N	Connector	Termination	Hood
<b>WHMRM20/△△</b>	MR-20LM	Soldering	Plastic
<b>WHMRF20/△△</b>	MR-20LF	Soldering	Plastic
<b>WHMRM50/△△</b>	MR-50LM	Soldering	Plastic
<b>WHMRF50/△△</b>	MR-50LF	Soldering	Plastic